




MA-685C

16L Commercial Indoor Model

Main Features

- Oversized display
- Smart Digital constant temperature function
- Segmented combustion
- Self-diagnose, Trouble code can be shown On the display window
- VFD digital temperature display
- High efficiency burner and sealed combustion room
- Oxygen-free copper heat exchanger
- Designer panel

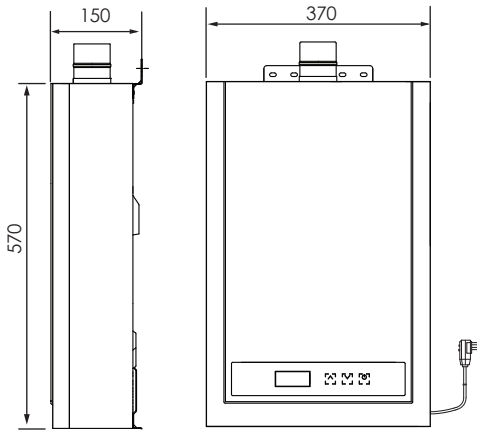

Specifications (Commercial Indoor Model)

Model	MA-685C
Type of appliance:	Type B
Type of Gas	Town gas(G110)
Gas Pressure	8 mbar to 20 mbar
MaxGasConsumption	6.6 ~ 6.8 m ³ /h
Hot Water Outlet +25°C Rise	16 L/min
Temperature Range (°C)	36- 80
Efficiency	> 85%
Min Operating Water Pressure	0.02MPa
Max Operating Water Pressure	0.8MPa
Min flow rate	3.0 L/min
Water Pipe	G1/2 (water heater)
Gas Inlet	G 3/4
Exhaust Pipe	70mm
Power Supply	AC 220 - 240V 50Hz
Rated Power	50W (water heater)
Power Cable	1.2m
Weight	16KG
Extenal Dimension	H 570 x W370 x D150mm

TYPICAL INSTALLATION

